


# CVM BDM

Three-phase power analyzer(balanced and unbalanced) for DIN rail mounting, with internal 1 MB memory

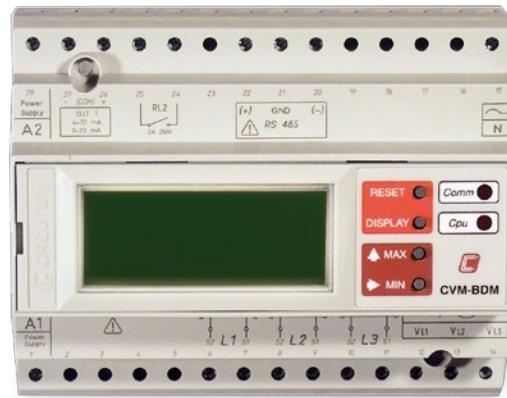

## Description

Three-phase power analyzer(balanced and unbalanced) for its assembly on DIN rails, with internal 1 MB memory, measuring in 4 quadrants.

Other features include:

- Current measuring .../5 A
- Measuring of active (kW·h) and reactive (kvarh) energy consumed and generated, both capacitive and inductive. (4 quadrants)
- 8 module DIN rail format
- Adjustable dual kW/MW scale
- Calculates the flicker per phase
- RS-485 communications with Modbus RTU and Zmodem protocol to download files
- Optional second RS-485 port to connect I/O peripherals
- ITF Technology: galvanic insulation protection inputs, depending on the type
- Default page selection
- Optional use of rates with RED or RED-MAX modules

## Application

- Application for the control of switchboards and low and medium voltage connection points, where an analyzer must be installed on the DIN rail
- Control of instantaneous, maximum and minimum values of the electrical parameters metered
- Applications where the analyzer's memory must store the electrical parameters measured.

## Features

<b>Power supply circuit</b>	230 Vac (-15...+10%). For other values, see the coding table
Consumption	6 V·A
Frequency	45..0.65 Hz
<b>Metering circuit</b>	
Nominal voltage	500 Vac (ph-n) / 866 Vac (ph-ph)
Frequency	40...65 Hz
Current consumption of the circuit	0.6 V·A
Nominal current	... / 5 A
Overload (permanent)	1.2 $I_n$
<b>Class/Accuracy</b>	
Voltage	0.5 % $\pm$ 2 digits
Current	0.5 % $\pm$ 2 digits
Power rating	1 % $\pm$ 2 digits
<b>Internal memory</b>	1 MB
<b>Ambient conditions</b>	
Operating temperature	-10 ... +50 °C
Relative humidity (non-condensing)	5 ... 95%
<b>Build features</b>	
Type of box	VO self-extinguishing plastic
Degree of protection	Embedded equipment: IP 41 Terminals: IP 20
Dimensions	140 x 110 x 70 mm (3 modules)
Weight	520 g
<b>Safety</b>	
Designed for CAT III 300/520 Vac installations, in accordance with EN 61010. Double-insulated electric shock protection, class II	
<b>Standards</b>	
IEC 664, VDE 0110, UL 94, IEC 801, IEC 348, IEC 571-1, EN 61000-6-3, EN 61000-6-1, EN 61010-1	

## CVM BDM

Three-phase power analyzer  
(balanced and unbalanced) for its assembly on DIN rails,  
with internal 1 MB memory




### References

Quadrants	Class (V,A)	Clock	THD/D (V,A)	Maximum demand	Flicker meter	Harmonics meter	MODBUS / RTU Communications	Internal memory	Relay output	Output 4...20 mA	Type	Code
4	0,5	Yes	Yes	Yes	Yes	Yes	RS-485	1 MB	-	-	CVM-BDM	M52210
4	0,5	Yes	Yes	Yes	Yes	Yes	RS-485	1 MB	2	-	CVM-BDM-C2	M52211
4	0,5	Yes	Yes	Yes	Yes	Yes	-	1 MB	1	1	CVM-BDM-C420	M52212
4	0,5	Yes	Yes	Yes	Yes	Yes	RS-485	1 MB	-	2	CVM-BDM-420	M52213


### Coding table

M	5	X	X	X	0	0	X	X	X	X	
Code					Internal Code						
Power Supply Voltage (PSV)	Standard (230 Vac)				0						
	110 Vac				1						
	24..0.120 Vdc				5						
Voltage measurement (VM)	Standard (300 V <sub>ph-n</sub> /520 V <sub>ph-ph</sub> )				0						
	110 V <sub>ph-n</sub> / 190 V <sub>ph-ph</sub>				1						
	500 V <sub>ph-n</sub> / 866 V <sub>ph-ph</sub>				3						
Current input (CI)	Standard (.../ 5 A)				0						
	.../ 1 A (Only ITF)				1						
Other (only CVM-BD-RED/BDM)	Standard				0	0					
	RS-232 Communications				0	1					

### Dimensions

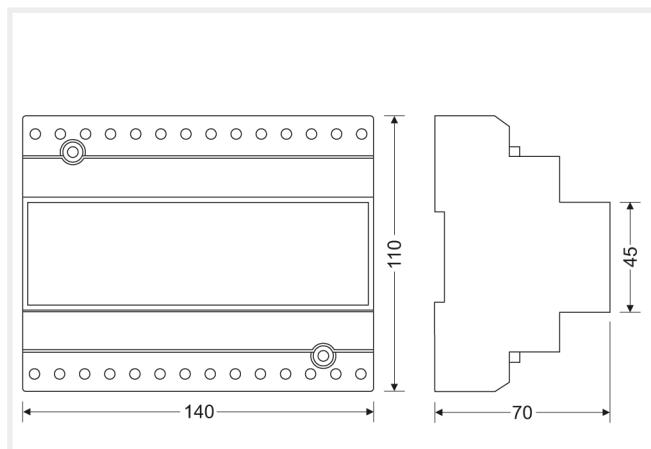

### Connections

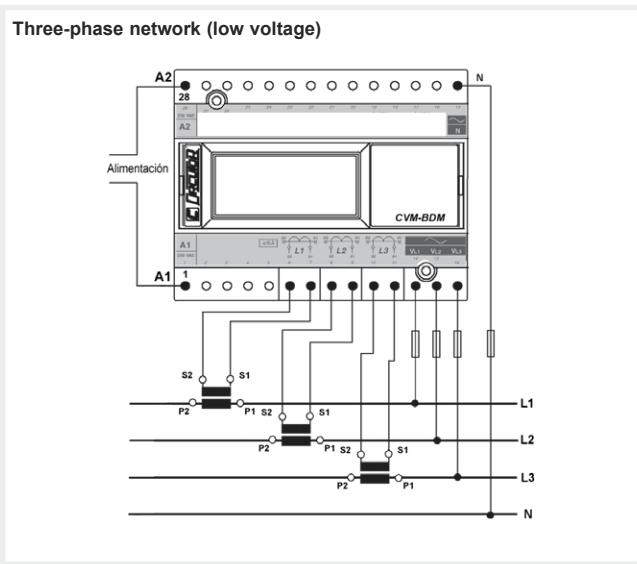

### 3 current transformers + 2 voltage transformers

