

## Digital instruments

**DM45 Series**

Digital indicator for DIN rail mounting

**Description**

- Electrical parameter indicator equipment
- Its design enables the installation of the unit on small panels
- It measures voltage, current, frequency and harmonic distortion, depending on the type
- Fully sealed
- Fully programmable alarm relay
- Robust and compact
- Stores maximum and minimum values

**Application**

- Displays one or various electrical parameters of a sub-panel, control process or determined machine
- Alarm system: the unit's internal relay can act on contactors, sound and/or light devices to carry out a protection or warning operation.

**Features**

	DM 45 V	DM 45 A	DM 45 AD	DM 45 F
<b>Power supply circuit</b>	230 Vac ( $\pm 10\%$ )			
Frequency	40 ... 70 Hz			
Consumption	5 V·A			
<b>Measurement circuit</b>				
Scope	600 Vac	... / 5 Aac	30 Aac	10...600 Hz
Accuracy	$\pm 0.5\%$ FE $\pm 1$ digit			
Overvoltage (permanent)	$1.05 U_n$	-	-	$1.05 U_n$
Overload (permanent)	-	$1.2 I_n$		-
Consumption	0.6 V·A			
Frequency	10...600 Hz			
<b>Display</b>	4 digits with 7 segments, red colour + 4 auxiliary LEDs			
<b>Ambient conditions</b>				
Storage temperature	- 40 ... + 70 °C			
Operating temperature	- 20 ... + 50 °C			
Relative humidity	5 ... 95 % non-condensing			
<b>Build features</b>				
Box material	Self-extinguishing ABS plastic			
Degree of protection	Front panel: IP 54			
Weight	170 g			
<b>Standards</b>	IEC 1010, IEC 664, IEC/EN 62053-31			
<b>Safety standards</b>	IEC61010			

### Digital instruments

## DM45 series

Digital indicator for DIN rail mounting



### References

#### DM. Voltmeter

Measurement	Parameters	Input	Relay	Type	Code
AC	V	30..0.600 Vac	1	DM 45 V	M20901

#### DM. Ammeters

Measurement	Parameters	Input	Relay	Type	Code
AC	A	... / 5 A	1	DM 45 A	M20911
AC	A	30 A	1	DM 45 AD	M20921

#### DM. Frequency-meter

Measurement	Parameters	Input	Relay	Type	Code
AC	Hz	10 ... 600 Hz	1	DM 45 F	M20931


#### DM. Measurement stations

Measurement	Parameters	Input	Relay	Type	Code
AC	V, A, Hz, THD	600 V / .../5 A / 10...600 Hz	1	DM 45 CM	M20941
AC	V, A, Hz, THD	600 V c / 30 A / 10...600 Hz	1	DM 45 CMD	M20951

### Coding table

Code	M	2	X	X	X	X	0	0	X
							Internal Code	↑	
Auxiliary power supply							Standard (230 V)	0	
							100 ... 115 V ac	1	
							18 ... 36 V dc	7	

### Dimensions

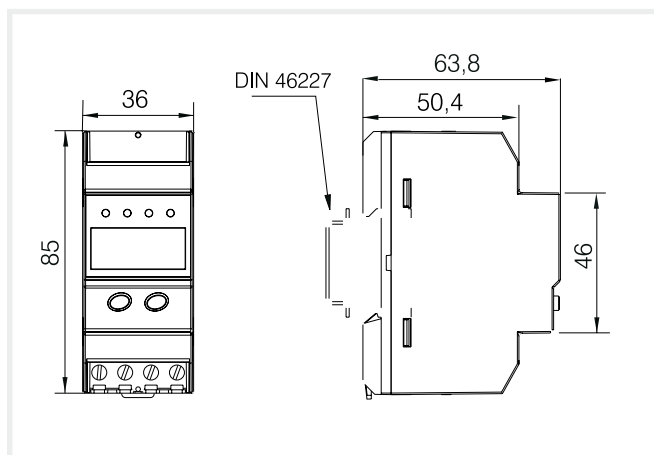

### Connections

